


C.Linear Guide




(1) Non-interchangeable type

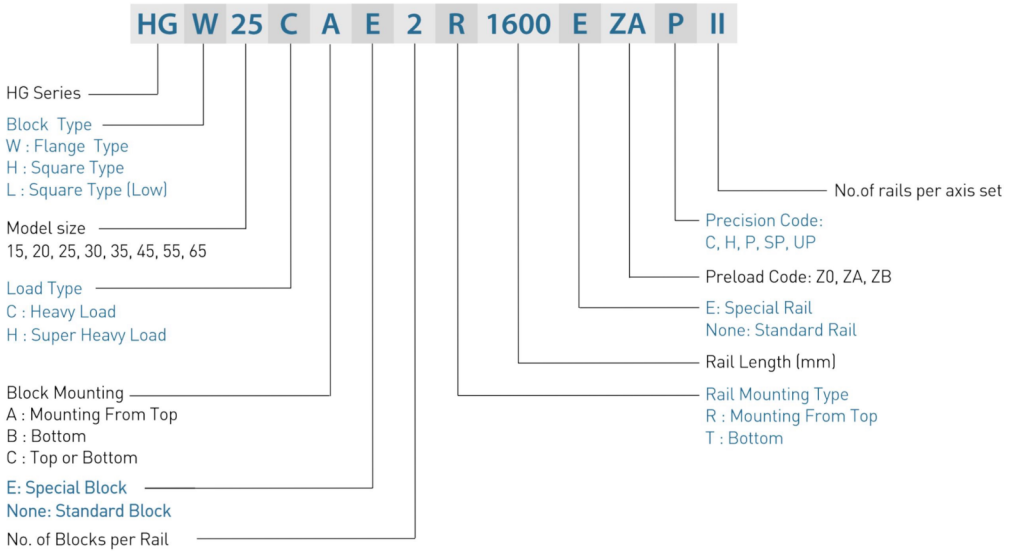


(2) Interchangeable type

○ Model Number of HG Block

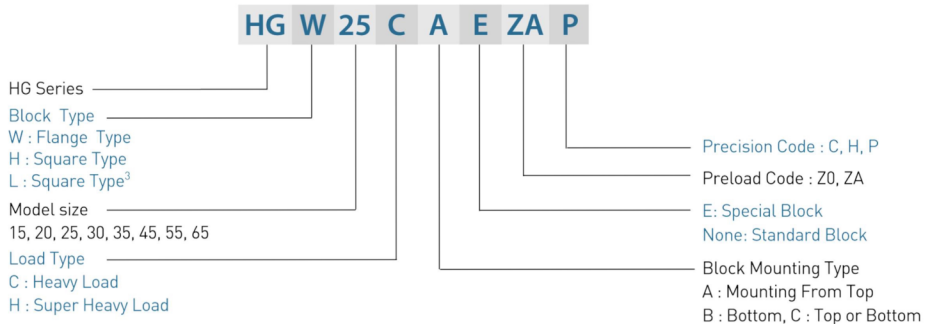


○ Model Number of HG Rail

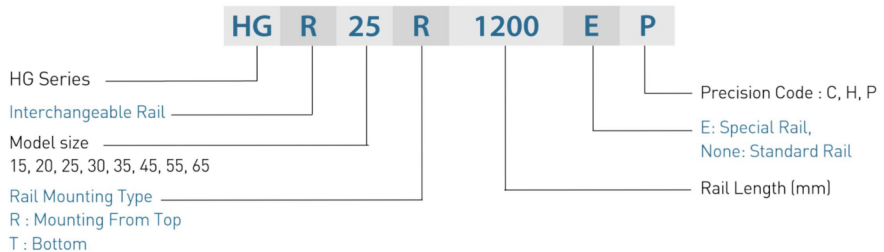

HG Series
 Heavy Load Ball Type

2-1-13 Dimensions for HIWIN HG Series



(1) HGH-CA / HGH-HA

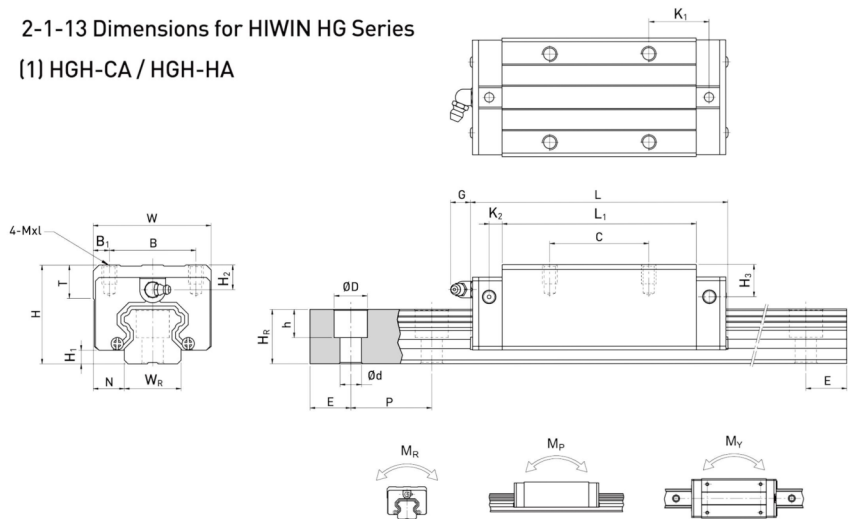

Model No.	Dimensions of Assembly (mm)				Dimensions of Block (mm)														Dimensions of Rail (mm)						Mounting Bolt for Rail	Basic Dynamic Load Rating	Basic Static Load Rating	Static Rated Moment			Weight				
	H	H ₁	N	W	B	B ₁	C	L ₁	L	K ₁	K ₂	G	MxI	T	H ₂	H ₃	W _R	H _R	D	h	d	P	E	(mm)				C(kN)	C ₀ (kN)	M _R	M _P	M _Y	Block	Rail	
HGH15CA	28	4.3	9.5	34	26	4	26	39.4	61.4	10	4.85	5.3	M4x5	6	7.95	7.7	15	15	7.5	5.3	4.5	60	20	M4x16	11.38	16.97	0.12	0.10	0.10	0.18	1.45				
HGH20CA	30	4.6	12	44	32	6	36	50.5	77.5	12.25	6	12	M5x6	8	6	6	20	17.5	9.5	8.5	6	60	20	M5x16	17.75	27.76	0.27	0.20	0.20	0.30		2.21			
HGH20HA							50	65.2	92.2	12.6															21.18	35.9	0.35	0.35	0.35	0.39					
HGH25CA	40	5.5	12.5	48	35	6.5	35	58	84	15.7	6	12	M6x8	8	10	9	23	22	11	9	7	60	20	M6x20	26.48	36.49	0.42	0.33	0.33	0.51		3.21			
HGH25HA							50	78.6	104.6	18.5															32.75	49.44	0.56	0.57	0.57	0.69					
HGH30CA	45	6	16	60	40	10	40	70	97.4	20.25	6	12	M8x10	8.5	9.5	13.8	28	26	14	12	9	80	20	M8x25	38.74	52.19	0.66	0.53	0.53	0.88		4.47			
HGH30HA							60	93	120.4	21.75															47.27	69.16	0.88	0.92	0.92	1.16					
HGH35CA	55	7.5	18	70	50	10	50	80	112.4	20.6	7	12	M8x12	10.2	16	19.6	34	29	14	12	9	80	20	M8x25	49.52	69.16	1.16	0.81	0.81	1.45		6.30			
HGH35HA							72	105.8	138.2	22.5															60.21	91.63	1.54	1.40	1.40	1.92					
HGH45CA	70	9.5	20.5	86	60	13	60	97	139.4	23	10	12.9	M10x17	16	18.5	30.5	45	38	20	17	14	105	22.5	M12x35	77.57	102.71	1.98	1.55	1.55	2.73		10.41			
HGH45HA							80	128.8	171.2	28.9															94.54	136.46	2.63	2.68	2.68	3.61					
HGH55CA	80	13	23.5	100	75	12.5	75	117.7	166.7	27.35	11	12.9	M12x18	17.5	22	29	53	44	23	20	16	120	30	M14x45	114.44	148.33	3.69	2.64	2.64	4.17		15.08			
HGH55HA							95	155.8	204.8	36.4															139.35	196.2	4.88	4.57	4.57	5.49					
HGH65CA	90	15	31.5	126	76	25	70	144.2	200.2	43.1	14	12.9	M16x20	25	15	15	63	53	26	22	18	150	35	M16x50	163.63	215.33	6.65	4.27	4.27	7.00		21.18			
HGH65HA							120	203.6	259.6	47.8															208.36	303.13	9.38	7.38	7.38	9.82					
Note : 1 kgf = 9.81 N																																			

Note : 1 kgf = 9.81 N

(2) HGL-CA / HGL-HA

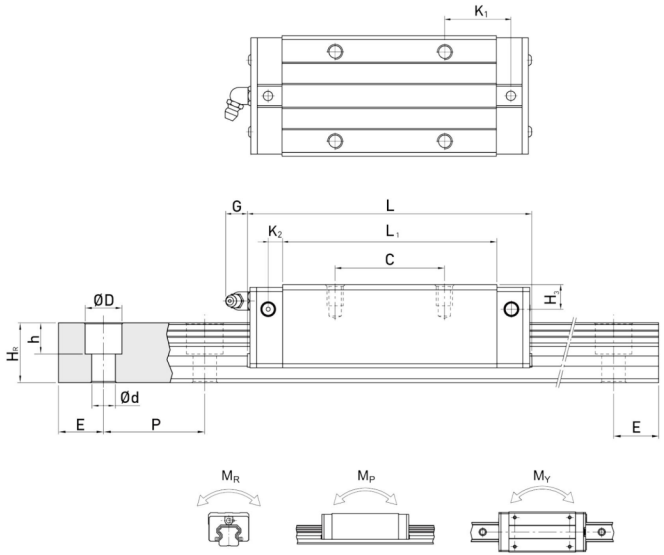


Model No.	Dimensions of Assembly (mm)			Dimensions of Block (mm)													Dimensions of Rail (mm)							Mounting Bolt for Rail	Basic Dynamic Load Rating	Basic Static Load Rating	Static Rated Moment			Weight	
																											M _R	M _P	M _V	Block	Rail
	H	H ₁	N	W	B	B ₁	C	L ₁	L	K ₁	K ₂	G	MxL	T	H ₂	H ₃	W _R	H _R	D	h	d	P	E	(mm)	C(kN)	C ₀ (kN)	kN-m	kN-m	kN-m	kg	kg/m
HGL15CA	24	4.3	9.5	34	26	4	26	39.4	61.4	10	4.85	5.3	M4x4	6	3.95	3.7	15	15	7.5	5.3	4.5	60	20	M4x16	11.38	16.97	0.12	0.10	0.10	0.14	1.45
HGL25CA	36	5.5	12.5	48	35	6.5	35	58	84	15.7	6	12	M6x6	8	6	5	23	22	11	9	7	60	20	M6x20	26.48	36.49	0.42	0.33	0.33	0.42	3.21
HGL25HA							50	78.6	104.6	18.5																					
HGL30CA	42	6	16	60	40	10	40	70	97.4	20.25	6	12	M8x10	8.5	6.5	10.8	28	26	14	12	9	80	20	M8x25	38.74	52.19	0.66	0.53	0.53	0.78	4.47
HGL30HA							60	93	120.4	21.75																					
HGL35CA	48	7.5	18	70	50	10	50	80	112.4	20.6	7	12	M8x12	10.2	9	12.6	34	29	14	12	9	80	20	M8x25	49.52	69.16	1.16	0.81	0.81	1.14	6.30
HGL35HA							72	105.8	138.2	22.5																					
HGL45CA	60	9.5	20.5	86	60	13	60	97	139.4	23	10	12.9	M10x17	16	8.5	20.5	45	38	20	17	14	105	22.5	M12x35	77.57	102.71	1.98	1.55	1.55	2.08	10.41
HGL45HA							80	128.8	171.2	28.9																					
HGL55CA	70	13	23.5	100	75	12.5	75	117.7	166.7	27.35	11	12.9	M12x18	17.5	12	19	53	44	23	20	16	120	30	M14x45	114.44	148.33	3.69	2.64	2.64	3.25	15.08
HGL55HA							95	155.8	204.8	36.4																					

Note : 1 kgf = 9.81 N

HG Series Heavy Load Ball Type


(3) HGW-CA / HGW-HA

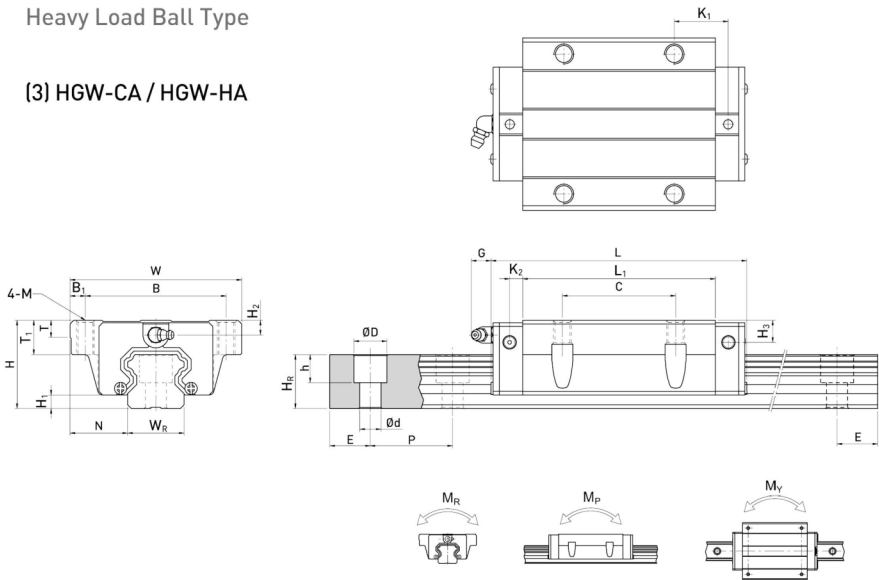

Model No.	Dimensions of Assembly (mm)			Dimensions of Block (mm)																Dimensions of Rail (mm)										Mounting Bolt for Rail	Basic Dynamic Load Rating	Basic Static Load Rating	Static Rated Moment			Weight	
	H	H ₁	N	W	B	B ₁	C	L ₁	L	K ₁	K ₂	G	M	T	T ₁	H ₂	H ₃	W _R	H _R	D	h	d	P	E	(mm)	C ₁ (kN)	C ₂ (kN)	M _R	M _P				M _Y	Block	Rail		
HGW15CA	24	4.3	16	47	38	4.5	30	39.4	61.4	8	4.85	5.3	M5	6	8.9	3.95	3.7	15	15	7.5	5.3	4.5	60	20	M4x16	11.38	16.97	0.12	0.10	0.10	0.17	1.45					
HGW20CA	30	4.6	21.5	63	53	5	40	50.5	77.5	10.25	6	12	M6	8	10	6	6	20	17.5	9.5	8.5	6	60	20	M5x16	17.75	27.76	0.27	0.20	0.20	0.40	2.21					
HGW20HA		65.2	92.2	17.6																							21.18	35.9	0.35	0.35	0.35		0.52				
HGW25CA	36	5.5	23.5	70	57	6.5	45	58	84	10.7	6	12	M8	8	14	6	5	23	22	11	9	7	60	20	M6x20	26.48	36.49	0.42	0.33	0.33	0.59	3.21					
HGW25HA		78.6	104.6	21																							32.75	49.44	0.56	0.57	0.57		0.80				
HGW30CA	42	6	31	90	72	9	52	70	97.4	14.25	6	12	M10	8.5	16	6.5	10.8	28	26	14	12	9	80	20	M8x25	38.74	52.19	0.66	0.53	0.53	1.09	4.47					
HGW30HA		93	120.4	25.75																							47.27	69.16	0.88	0.92	0.92		1.44				
HGW35CA	48	7.5	33	100	82	9	62	80	112.4	14.6	7	12	M10	10.1	18	9	12.6	34	29	14	12	9	80	20	M8x25	49.52	69.16	1.16	0.81	0.81	1.56	6.30					
HGW35HA		105.8	138.2	27.5																							60.21	91.63	1.54	1.40	1.40		2.06				
HGW45CA	60	9.5	37.5	120	100	10	80	97	139.4	13	10	12.9	M12	15.1	22	8.5	20.5	45	38	20	17	14	105	22.5	M12x35	77.57	102.71	1.98	1.55	1.55	2.79	10.41					
HGW45HA		128.8	171.2	28.9																							94.54	136.46	2.63	2.68	2.68		3.69				
HGW55CA	70	13	43.5	140	116	12	95	117.7	166.7	17.35	11	12.9	M14	17.5	26.5	12	19	53	44	23	20	16	120	30	M14x45	114.44	148.33	3.69	2.64	2.64	4.52	15.08					
HGW55HA		155.8	204.8	36.4																							139.35	196.2	4.88	4.57	4.57		5.96				
HGW65CA	90	15	53.5	170	142	14	110	144.2	200.2	23.1	14	12.9	M16	25	37.5	15	15	63	53	26	22	18	150	35	M16x50	163.63	215.33	6.65	4.27	4.27	9.17	21.18					
HGW65HA		203.6	259.6	52.8																							208.36	303.13	9.38	7.38	7.38		12.89				

Note : 1 kgf = 9.81 N

(4) HGW-CB / HGW-HB

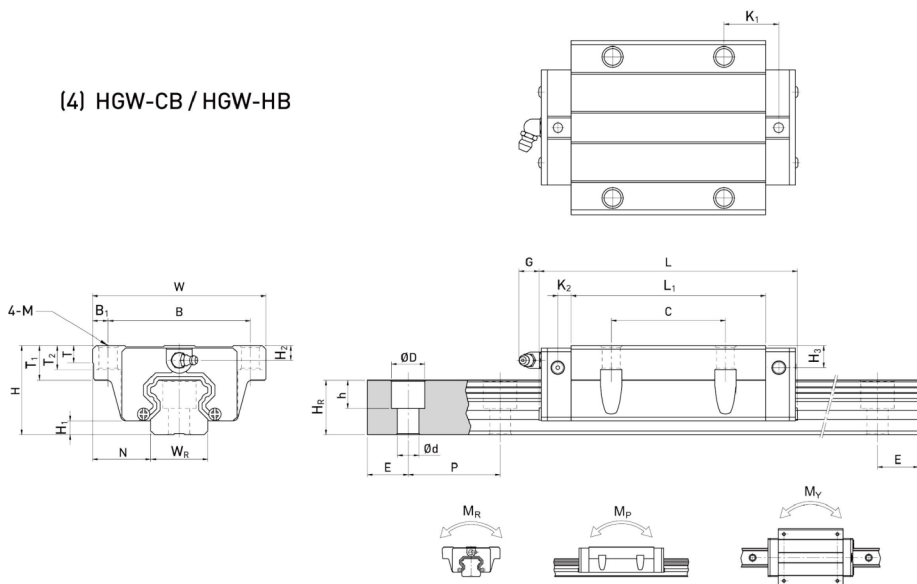



Model No.	Dimensions of Assembly (mm)			Dimensions of Block (mm)																	Dimensions of Rail (mm)							Mounting Bolt for Rail	Basic Dynamic Load Rating	Basic Static Load Rating	Static Rated Moment			Weight	
																															M _R	M _P	M _Y	Block	Rail
	H	H ₁	N	W	B	B ₁	C	L ₁	L	K ₁	K ₂	G	M	T	T ₁	T ₂	H ₂	W ₂	W _R	H _R	D	h	d	P	E	(mm)	C[kN]				C ₀ [kN]	kN·m	kN·m	kN·m	kg
HGW15CB	24	4.3	16	47	38	4.5	30	39.4	61.4	8	4.85	5.3	04.5	6	8.9	6.95	3.95	3.7	15	15	7.5	5.3	4.5	6	20	4	M4x16	11.38	16.97	0.12	0.10	0.10	0.17	1.45	
HGW20CB	30	4.6	21.5	63	53	5	40	50.5	77.5	10.25	6	12	06	8	10	9.5	6	6	20	17.5	9.5	8.5	6	60	20	4	M5x16	17.75	27.76	0.27	0.20	0.20	0.40	2.21	
HGW20HB	30	4.6	21.5	63	53	5	40	65.2	92.2	17.6	6	12	07	8	10	9.5	6	6	20	17.5	9.5	8.5	6	60	20	4	M5x16	21.18	35.9	0.35	0.35	0.35	0.52	2.21	
HGW25CB	36	5.5	23.5	70	57	6.5	45	58	84	10.7	6	12	07	8	14	10	6	5	23	22	11	9	7	60	20	4	M6x20	26.48	36.49	0.42	0.33	0.33	0.59	3.21	
HGW25HB	36	5.5	23.5	70	57	6.5	45	78.6	104.6	21	6	12	07	8	14	10	6	5	23	22	11	9	7	60	20	4	M6x20	32.75	49.44	0.56	0.57	0.57	0.80	3.21	
HGW30CB	42	6	31	90	72	9	52	70	97.4	14.25	6	12	09	8.5	16	10	6.5	10.8	28	26	14	12	9	80	20	4	M8x25	38.74	52.19	0.66	0.53	0.53	1.09	4.47	
HGW30HB	42	6	31	90	72	9	52	93	120.4	25.75	6	12	09	8.5	16	10	6.5	10.8	28	26	14	12	9	80	20	4	M8x25	47.27	69.16	0.88	0.92	0.92	1.44	4.47	
HGW35CB	48	7.5	33	100	82	9	62	80	112.4	14.6	7	12	09	10.1	18	13	9	12.6	34	29	14	12	9	80	20	4	M8x25	49.52	69.16	1.16	0.81	0.81	1.56	6.30	
HGW35HB	48	7.5	33	100	82	9	62	105.8	138.2	27.5	7	12	09	10.1	18	13	9	12.6	34	29	14	12	9	80	20	4	M8x25	60.21	91.63	1.54	1.40	1.40	2.06	6.30	
HGW45CB	60	9.5	37.5	120	100	10	80	97	139.4	13	10	12.9	011	15.1	22	15	8.5	20.5	45	38	20	17	14	105	22.5	4	M12x35	77.57	102.71	1.98	1.55	1.55	2.79	10.41	
HGW45HB	60	9.5	37.5	120	100	10	80	128.8	171.2	28.9	10	12.9	014	17.5	26.5	17	12	19	53	44	23	20	16	120	30	4	M12x35	94.54	136.46	2.63	2.68	2.68	3.69	10.41	
HGW55CB	70	13	43.5	140	116	12	95	117.7	166.7	17.35	11	12.9	014	17.5	26.5	17	12	19	53	44	23	20	16	120	30	4	M14x45	114.44	148.33	3.69	2.64	2.64	4.52	15.08	
HGW55HB	70	13	43.5	140	116	12	95	155.8	204.8	36.4	11	12.9	014	17.5	26.5	17	12	19	53	44	23	20	16	120	30	4	M14x45	139.35	196.2	4.88	4.57	4.57	5.96	15.08	
HGW65CB	90	15	53.5	170	142	14	110	144.2	200.2	23.1	14	12.9	016	25	37.5	23	15	15	63	53	26	22	18	150	35	4	M16x50	163.63	215.33	6.65	4.27	4.27	9.17	21.18	
HGW65HB	90	15	53.5	170	142	14	110	203.6	259.6	52.8	14	12.9	016	25	37.5	23	15	15	63	53	26	22	18	150	35	4	M16x50	208.36	303.13	9.38	7.38	7.38	12.89	21.18	

Note : 1 kgf = 9.81 N

HG Series

Heavy Load Ball Type


(5) HGW-CC / HGW-HC

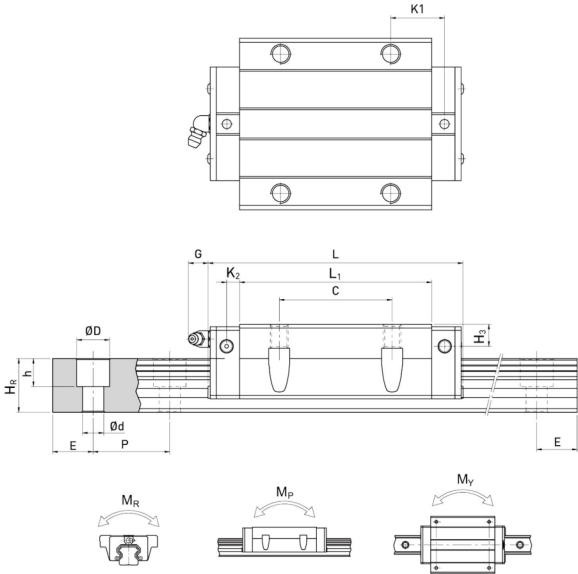

Model No.	Dimensions of Assembly (mm)			Dimensions of Block (mm)																Dimensions of Rail (mm)										Mounting Bolt for Rail	Basic Dynamic Load Rating	Basic Static Load Rating	Static Rated Moment			Weight	
	H	H ₁	N	W	B	B ₁	C	L ₁	L	K ₁	K ₂	G	M	T	T ₁	T ₂	H ₃	W ₄	H ₄	D	h	d	P	E	M ₄	M ₂	M ₁	Block	Rail								
HGW15CC	24	4.3	16	47	38	4.5	30	39.4	61.4	8	4.85	5.3	M5	6	8.9	6.95	3.95	3.7	15	15	7.5	5.3	4.5	40	20	M4x16	11.38	16.97	0.12	0.10	0.10	0.17	1.45				
HGW20CC	30	4.6	21.5	63	53	5	40	50.5	77.5	10.25	6	12	M6	8	10	9.5	6	6	20	17.5	9.5	8.5	6	60	20	M5x16	17.75	27.76	0.27	0.20	0.20	0.40	2.21				
HGW20HC								65.2	92.2	17.6																	21.18	35.9	0.35	0.35	0.35	0.52					
HGW25CC	36	5.5	23.5	70	57	6.5	45	58	84	10.7	6	12	M8	8	14	10	6	5	23	22	11	9	7	60	20	M6x20	26.48	36.49	0.42	0.33	0.33	0.59	3.21				
HGW25HC								78.6	104.6	21																	32.75	49.44	0.56	0.57	0.57	0.80					
HGW30CC	42	6	31	90	72	9	52	70	97.4	14.25	6	12	M10	8.5	16	10	6.5	10.8	28	26	14	12	9	80	20	M8x25	38.74	52.19	0.66	0.53	0.53	1.09	4.47				
HGW30HC								93	120.4	25.75																	47.27	69.16	0.88	0.92	0.92	1.44					
HGW35CC	48	7.5	33	100	82	9	62	80	112.4	14.6	7	12	M10	10.1	18	13	9	12.6	34	29	14	12	9	80	20	M8x25	49.52	69.16	1.16	0.81	0.81	1.56	6.30				
HGW35HC								105.8	138.2	27.5																	60.21	91.63	1.54	1.40	1.40	2.06					
HGW45CC	60	9.5	37.5	120	100	10	80	97	139.4	13	10	12.9	M12	15.1	22	15	8.5	20.5	45	38	20	17	14	105	22.5	M12x35	77.57	102.71	1.98	1.55	1.55	2.79	10.41				
HGW45HC								128.8	171.2	28.9																	94.54	136.46	2.63	2.68	2.68	3.69					
HGW55CC	70	13	43.5	140	116	12	95	117.7	166.7	17.35	11	12.9	M14	17.5	26.5	17	12	19	53	44	23	20	16	120	30	M14x45	114.44	148.33	3.69	2.64	2.64	4.52	15.08				
HGW55HC								155.8	204.8	36.4																	139.35	196.2	4.88	4.57	4.57	5.96					
HGW65CC	90	15	53.5	170	142	14	110	144.2	200.2	23.1	14	12.9	M16	25	37.5	23	15	15	63	53	26	22	18	150	35	M16x50	163.63	215.33	6.65	4.27	4.27	9.17	21.18				
HGW65HC								203.6	259.6	52.8																	208.36	303.13	9.38	7.38	7.38	12.89					


Note : 1 kgf = 9.81 N

(1) Non-interchangeable type

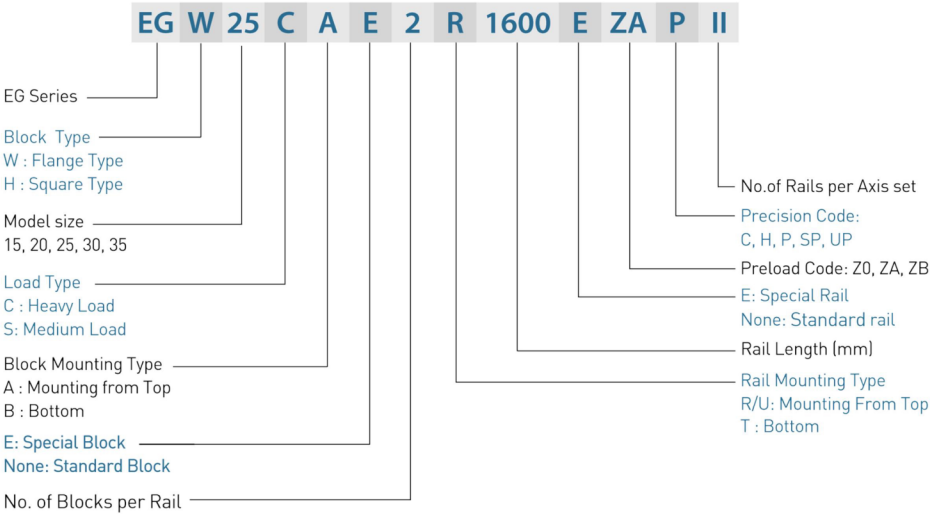


(2) Interchangeable type

○ Model Number of EG Block

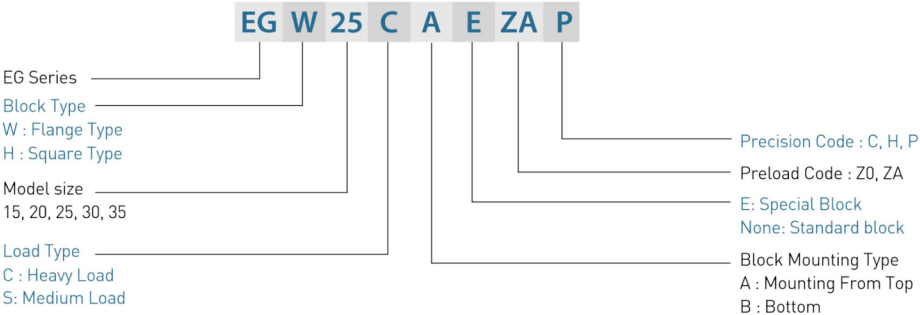


○ Model Number of EG Rail

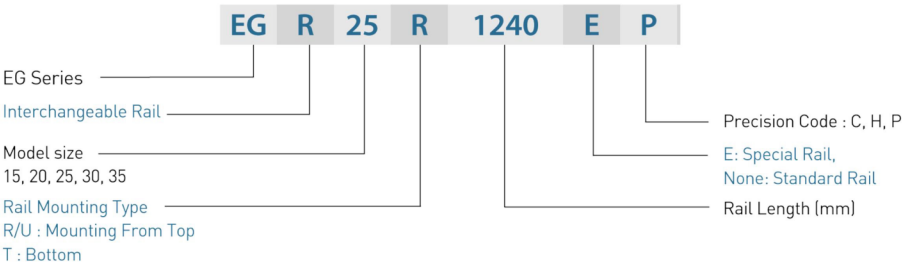

2-2-13 Dimensions for HIWIN EG Series

(1) EGH-SA / EGH-CA

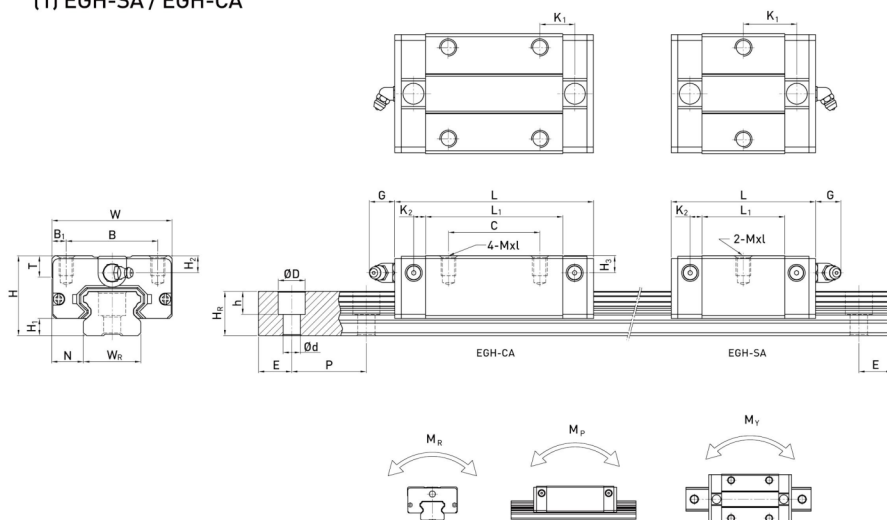


Model No.	Dimensions of Assembly (mm)			Dimensions of Block (mm)														Dimensions of Rail (mm)							Mounting Bolt for Rail	Basic Dynamic Load Rating	Basic Static Load Rating	Static Rated Moment			Weight		
	H	H ₁	N	W	B	B ₁	C	L ₁	L	K ₁	K ₂	G	MxL	T	H ₂	H ₃	W _R	H _R	D	h	d	P	E	C ₁ (kN)				C ₂ (kN)	M _R kN-m	M _P kN-m	M _Y kN-m	Block kg	Rail kg/m
EGH15SA	24	4.5	9.5	34	26	4	-	23.1	40.1	14.8	3.5	5.7	M4x6	6	5.5	6	15	12.5	6	4.5	3.5	60	20	M3x16	5.35	9.40	0.08	0.04	0.04	0.09	1.25		
EGH15CA							26	39.8	56.8	10.15																							
EGH20SA	28	6	11	42	32	5	-	29	50	18.75	4.15	12	M5x7	7.5	6	6	20	15.5	9.5	8.5	6	60	20	M5x16	7.23	12.74	0.13	0.06	0.06	0.15	2.08		
EGH20CA							32	48.1	69.1	12.3																							
EGH25SA	33	7	12.5	48	35	6.5	-	35.5	59.1	21.9	4.55	12	M6x9	8	8	8	23	18	11	9	7	60	20	M6x20	11.40	19.50	0.23	0.12	0.12	0.25	2.67		
EGH25CA							35	59	82.6	16.15																							
EGH30SA	42	10	16	60	40	10	-	41.5	69.5	26.75	6	12	M8x12	9	8	9	28	23	11	9	7	80	20	M6x25	16.42	28.10	0.40	0.21	0.21	0.45	4.35		
EGH30CA							40	70.1	98.1	21.05																							
EGH35SA	48	11	18	70	50	10	-	45	75	28.5	7	12	M8x12	10	8.5	8.5	34	27.5	14	12	9	80	20	M8x25	22.66	37.38	0.56	0.31	0.31	0.66	6.14		
EGH35CA							50	78	108	20																							

Note : 1 kgf = 9.81 N

EG Series

Low Profile Ball Type


(2) EGW-SA / EGW-CA

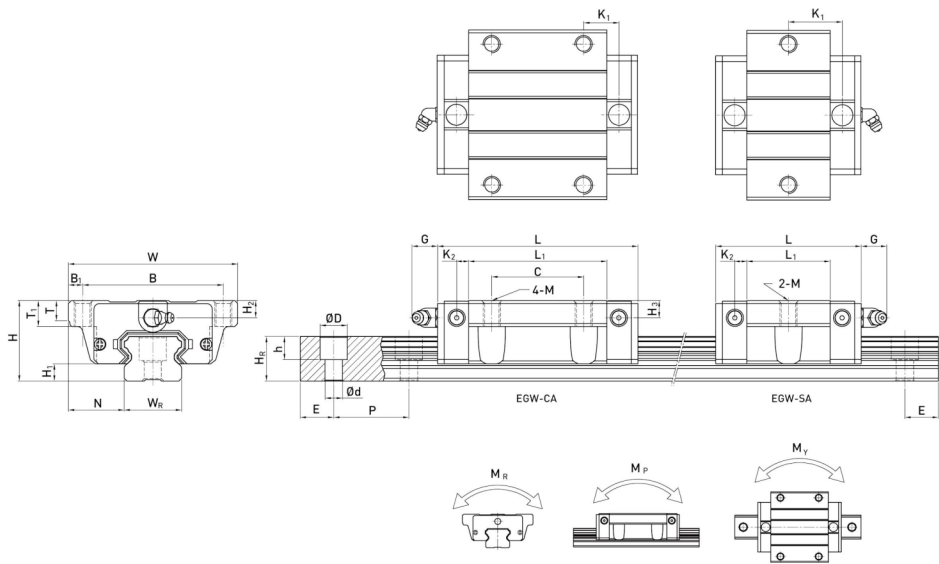

Model No.	Dimensions of Assembly (mm)		Dimensions of Block (mm)														Dimensions of Rail (mm)										Mounting Bolt for Rail	Basic Dynamic Load Rating	Basic Static Load Rating	Static Rated Moment			Weight	
	H	H ₁	N	W	B	B ₁	C	L ₁	L	K ₁	K ₂	G	M	T	T ₁	H ₂	H ₃	W _R	H _R	D	h	d	P	E	M _R	M _P				M _V	Block kg	Rail kg/m		
EGW15SA	24	4.5	18.5	52	41	5.5	-	23.1	40.1	14.8	3.5	5.7	M5	5	7	5.5	6	15	12.5	6	4.5	3.5	60	20	M3x16	5.35	9.40	0.08	0.04	0.04	0.12	1.25		
EGW15CA							26	39.8	56.8	10.15																7.83	16.19	0.13	0.10	0.10	0.21			
EGW20SA	28	6	19.5	59	49	5	-	29	50	18.75	4.15	12	M6	7	9	6	6	20	15.5	9.5	8.5	6	60	20	M5x16	7.23	12.74	0.13	0.06	0.06	0.19	2.08		
EGW20CA							32	48.1	69.1	12.3																10.31	21.13	0.22	0.16	0.16	0.32			
EGW25SA	33	7	25	73	60	6.5	-	35.5	59.1	21.9	4.55	12	M8	7.5	10	8	8	23	18	11	9	7	60	20	M6x20	11.40	19.50	0.23	0.12	0.12	0.35	2.67		
EGW25CA							35	59	82.6	16.15																16.27	32.40	0.38	0.32	0.32	0.59			
EGW30SA	42	10	31	90	72	9	-	41.5	69.5	26.75	6	12	M10	7	10	8	9	28	23	11	9	7	80	20	M6x25	16.42	28.10	0.40	0.21	0.21	0.62	4.35		
EGW30CA							40	70.1	98.1	21.05																23.70	47.46	0.68	0.55	0.55	1.04			
EGW35SA	48	11	33	100	82	9	-	45	75	28.5	7	12	M10	10	13	8.5	8.5	34	27.5	14	12	9	80	20	M8x25	22.66	37.38	0.56	0.31	0.31	0.84	6.14		
EGW35CA							50	78	108	20																33.35	64.84	0.98	0.69	0.69	1.45			

Note : 1 kgf = 9.81 N

[3] EGW-SB / EGW-CB

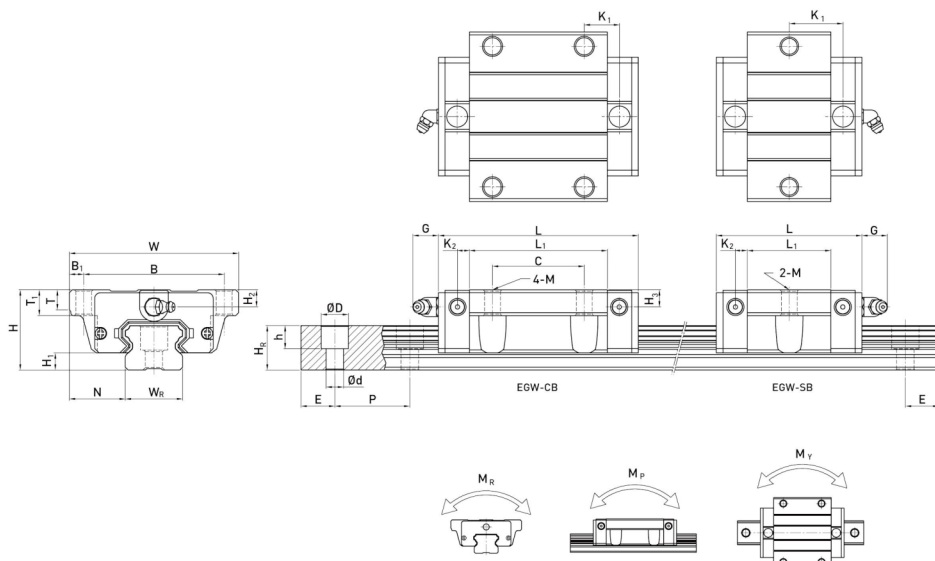


Model No.	Dimensions of Assembly (mm)		Dimensions of Block (mm)															Dimensions of Rail (mm)								Mounting Bolt for Rail	Basic Dynamic Load Rating	Basic Static Load Rating	Static Rated Moment			Weight	
			H	H ₁	N	W	B	B ₁	C	L ₁	L	K ₁	K ₂	G	M	T	T ₁	H ₂	H ₃	W _R	H _R	D	h	d	P				E	M _R	M _P	M _Y	Block
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
EGW15SB	24	4.5	18.5	52	41	5.5	-	23.1	40.1	14.8		3.5	5.7	Ø4.5	5	7	5.5	6	15	12.5	6	4.5	3.5	60	20	M3x16	5.35	9.40	0.08	0.04	0.04	0.12	
EGW15CB							26	39.8	56.8	10.15																M3x16	7.83	16.19	0.13	0.10	0.10	0.21	1.25
EGW20SB	28	6	19.5	59	49	5	-	29	50	18.75		4.15	12	Ø5.5	7	9	6	6	20	15.5	9.5	8.5	6	60	20	M5x16	7.23	12.74	0.13	0.06	0.06	0.19	
EGW20CB							32	48.1	69.1	12.3																M5x16	10.31	21.13	0.22	0.16	0.16	0.32	2.08
EGW25SB	33	7	25	73	60	6.5	-	35.5	59.1	21.9		4.55	12	Ø7	7.5	10	8	8	23	18	11	9	7	60	20	M6x20	11.40	19.50	0.23	0.12	0.12	0.35	
EGW25CB							35	59	82.6	16.15																M6x20	16.27	32.40	0.38	0.32	0.32	0.59	2.67
EGW30SB	42	10	31	90	72	9	-	41.5	69.5	26.75		6	12	Ø9	7	10	8	9	28	23	11	9	7	80	20	M6x25	16.42	28.10	0.40	0.21	0.21	0.62	
EGW30CB							40	70.1	98.1	21.05																M6x25	23.70	47.46	0.68	0.55	0.55	1.04	4.35
EGW35SB	48	11	33	100	82	9	-	45	75	28.5		7	12	Ø9	10	13	8.5	8.5	34	27.5	14	12	9	80	20	M8x25	22.66	37.38	0.56	0.31	0.31	0.84	
EGW35CB							50	78	108	20																M8x25	33.35	64.84	0.98	0.69	0.69	1.45	6.14

Note : 1 kgf = 9.81 N

MG Series


Miniature Type

(1) Non-interchangeable type

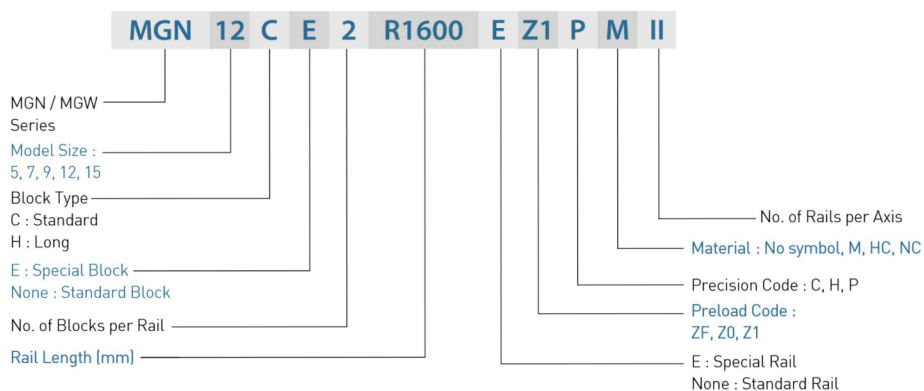


(2) Interchangeable type

○ Interchangeable Block

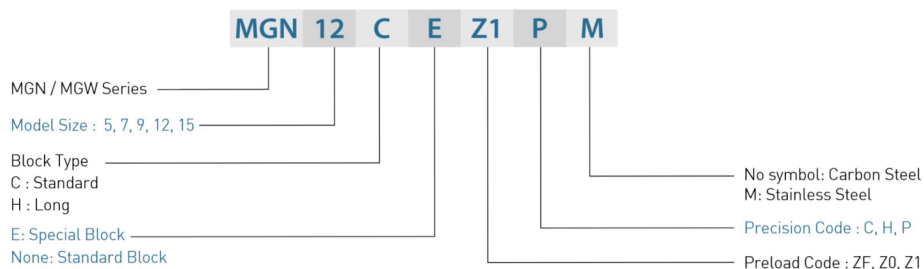



○ Interchangeable Rail

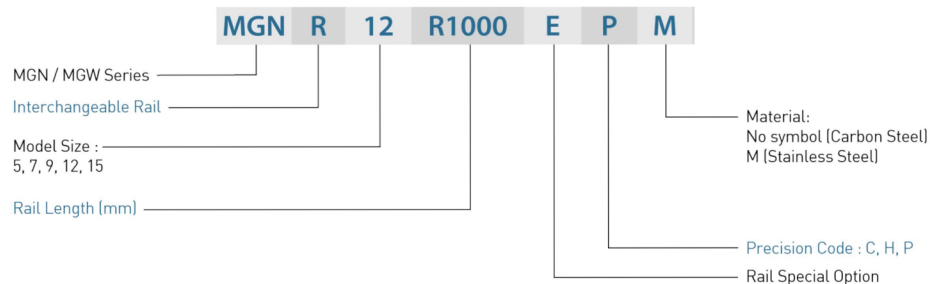




2-4-18 Dimensions for MGN/MGW Series

(1) MGN-C / MGN-H

MGN7, MGN9, MGN12

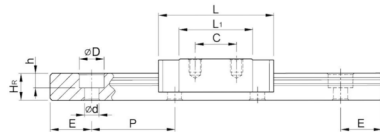

MGN15

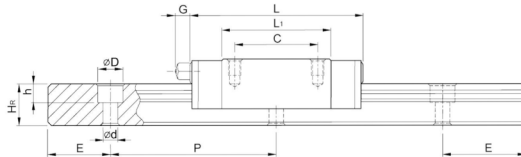

Model No.	Dimensions of Assembly (mm)			Dimensions of Block (mm)										Dimensions of Rail (mm)										Mounting Bolt for Rail	Basic Dynamic Load Rating	Basic Static Load Rating	Static Rated Moment			Weight	
	H	H ₁	N	W	B	B ₁	C	L ₁	L	G	G _s	MxI	H ₂	W _R	H _R	D	h	d	P	E	(mm)	C(kN)	C ₀ (kN)				M _R	M _y	M _z	Block	Rail
MGN 7C	8	1.5	5	17	12	2.5	8	13.5	22.5	-	Ø1.2	M2x2.5	1.5	7	4.8	4.2	2.3	2.4	15	5		M2x6	0.98	1.24	4.70	2.84	2.84	0.010	0.22		
MGN 7H							13	21.8	30.8														1.37	1.96	7.64	4.80	4.80	0.015			
MGN 9C	10	2	5.5	20	15	2.5	10	18.9	28.9	-	Ø1.4	M3x3	1.8	9	6.5	6	3.5	3.5	20	7.5		M3x8	1.86	2.55	11.76	7.35	7.35	0.016	0.38		
MGN 9H							16	29.9	39.9														2.55	4.02	19.60	18.62	18.62	0.026			
MGN 12C	13	3	7.5	27	20	3.5	15	21.7	34.7	-	Ø2	M3x3.5	2.5	12	8	6	4.5	3.5	25	10		M3x8	2.84	3.92	25.48	13.72	13.72	0.034	0.65		
MGN 12H							20	32.4	45.4														3.72	5.88	38.22	36.26	36.26	0.054			
MGN 15C	16	4	8.5	32	25	3.5	20	26.7	42.1	4.5	M3	M3x4	3	15	10	6	4.5	3.5	40	15		M3x10	4.61	5.59	45.08	21.56	21.56	0.059	1.06		
MGN 15H							25	43.4	58.8														6.37	9.11	73.50	57.82	57.82	0.092			



Note : 1 kgf = 9.81 N

MG Series



Miniature Type

(2) MGW-C / MGW-H

MGW7, MGW9, MGW12



MGW15

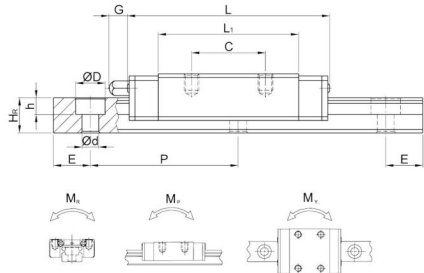

Model No.	Dimensions of Assembly (mm)			Dimensions of Block (mm)										Dimensions of Rail (mm)										Mounting Bolt for Rail	Basic Dynamic Load Rating	Basic Static Load Rating	Static Rated Moment			Weight	
																											M _R	M _P	M _V	Block	Rail
	H	H ₁	N	W	B	B ₁	C	L ₁	L	G	G ₁	MxL	H ₂	W _R	W _B	H _R	D	h	d	P	E	(mm)	C(kN)	C ₀ (kN)	N-m	N-m	N-m	kg	kg/m		
MGW7C	9	1.9	5.5	25	19	3	10	21	31.2	-	Ø1.2	M3x3	1.85	14	-	5.2	6	3.2	3.5	30	10	M3x6	1.37	2.06	15.70	7.14	7.14	0.020	0.51		
MGW7H							19	30.8	41														1.77	3.14	23.45	15.53	15.53	0.029			
MGW9C	12	2.9	6	30	21	4.5	12	27.5	39.3	-	Ø1.2	M3x3	2.4	18	-	7	6	4.5	3.5	30	10	M3x8	2.75	4.12	40.12	18.96	18.96	0.040	0.91		
MGW9H					23	3.5	24	38.5	50.7														3.43	5.89	54.54	34.00	34.00	0.057			
MGW12C	14	3.4	8	40	28	6	15	31.3	46.1	-	Ø1.2	M3x3.6	2.8	24	-	8.5	8	4.5	4.5	40	15	M4x8	3.92	5.59	70.34	27.80	27.80	0.071	1.49		
MGW12H					28	45.6	60.4																5.10	8.24	102.70	57.37	57.37	0.103			
MGW15C	16	3.4	9	60	45	7.5	20	38	54.8	5.2	M3	M4x4.2	3.2	42	23	9.5	8	4.5	4.5	40	15	M4x10	6.77	9.22	199.34	56.66	56.66	0.143	2.86		
MGW15H					35	57	73.8																8.93	13.38	299.01	122.60	122.60	0.215			
Note : 1 kgf = 9.81 N																															

Note : 1 kgf = 9.81 N